

TOE JACKS



TOE JACKS

TOE JACK PRO



LOW GROUND CLEARANCE -
Reliable manual jacks offers a low clearance of just 1", with a capacity of 100% on top and 80% on the toe. It can be operated both vertically and horizontally.

TOE JACK DELUXE



HIGH QUALITY LIFTING TOE -
Hilman Deluxe Jacks feature a high quality lifting toe that can be adjusted to several heights to accommodate different lift points.

DELUXE JACKING KIT



HYDRAULIC PUMP -
Our quality Toe Jack Kits include hydraulic pumps and have everything you need to lift equipment safely and efficiently.

**EASY LIFTING!
USE MANUALLY OR CONNECT TO PUMP!**



TOE JACK PRO

FASTER LIFT

Our Toe Jack Pro gets 20% more distance per stroke!

EASY OPERATION

Our 5 & 10 models can operate both vertically and horizontally, and have the 100% capacity on top, and 80% on toe.

EASILY REMOVABLE HANDLE

pulls on and off for transport and storage,
no pins or keys

FASTER LIFT

20% more distance per
stroke

CAST-IN HANDLE

for portability

OPERATES BOTH HORIZONTALLY
& VERTICALLY

FLAT FACE
for blocking

GENEROUS STROKE

8" on the 5 ton and 9" on the 10 ton

LOW TOE CLEARANCE
just over 1"

Hilman Part #	Capacity	Jack Height Retracted		Jack Height Extended		Toe Height		Total Stroke		Pumps (#)	Stroke/Pump		Weight	
		(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)		(in)	(mm)	(lb)	(kg)
HTJ-508	5 ton	14.5	368	22.5	571	1.040	26	8	203	45	0.178	4.5	42	19
HTJ-1009	10 ton	16.5	419	25.625	650	1.125	28	9.125	231	97	0.094	2.3	64.8	29


DELUXE JACKS

HIGH-QUALITY LIFTING TOE

The Hilman Deluxe Jacks are crafted with a premium lifting toe and adjustable height settings, allowing them to accommodate various lift points. These jacks also feature swivel feet for easy storage and a release valve for controlled, smooth lowering.

HYDRAULIC PUMP

Deluxe Jacks come with an external hose coupler that allows the user to attach an external hand or electric hydraulic pump for easy and safe positioning.

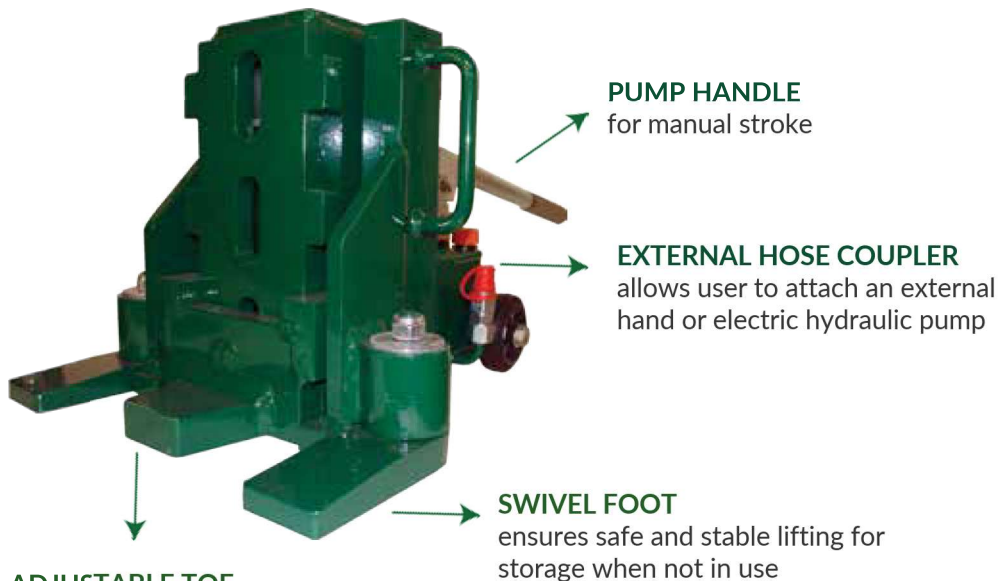

ADJUSTABLE TOE
3 positions to accommodate different lift points



DELUXE JACKS





HTJ-25D

HTJ-10D



Hilman Part #	Capacity	Claw Height		Adjustability		Stroke		Length		Width		Height		Weight	
		(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(lb)	(kg)
HTJ-10D	10 ton	0.79	20	3 x 3.19	3 x 81	5.5	140	10.67	271	10.9	277	9.8	250	62	28
HTJ-25D	25 ton	1.18	30	3 x 3.94	3 x 100	5.5	140	15.28	388	15.24	387	13.0	330	159	72

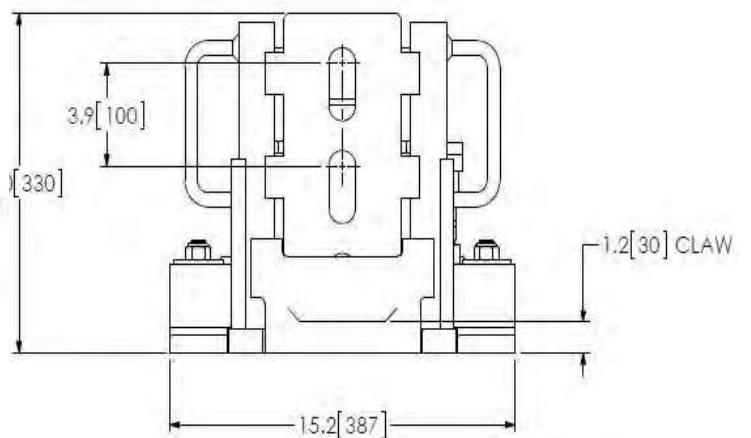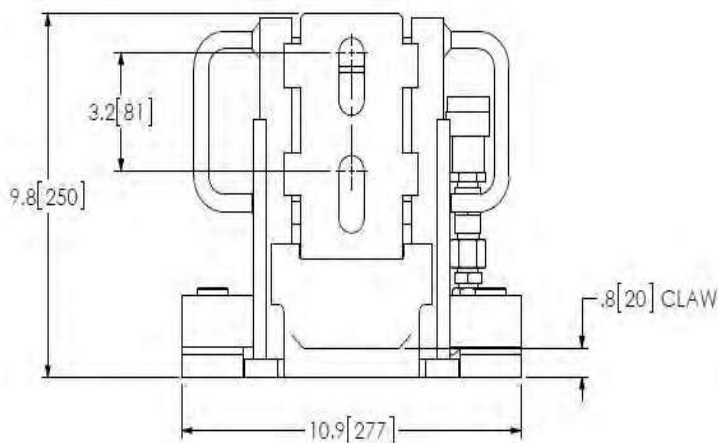

KITS

Everything you need to lift your load with minimal effort! This complete kit features a battery powered hydraulic pump, optional manual operation of jacks, adjustable toe, stabilizing feet, and a release valve for smooth lowering. System comes complete with two 10 ton deluxe hydraulic jacks (manual or automatic operation), portable hydraulic battery powered pump, and hydraulic hose assembly with 10' of hose for each jack. Available in 20 & 50 tons.

Hilman Part #	Lift Capacity	Charge Voltage
HTJ-20-1010-EB1	20 tons	115 VAC
HTJ-20-1010-EB2	20 tons	230 VAC, EU
HTJ-50-1010-EB1	50 tons	115 VAC
HTJ-50-1010-EB2	50 tons	230 VAC, EU
HTJ-50-1010-EP1	50 tons	110/115 VAC, 510-60 Hz SINGLE PHASE
HTJ-50-1010-EP2	50 tons	230 VAC, 50-60 Hz SINGLE PHASE

For custom hose lengths, please contact the factory.

